


ULTRA2 SCSI RAID CONTROLLER

- 1 Intel® i960® RD processor for peak performance
- 2 Expansion Modules add 1 or 2 additional Ultra2 SCSI channels or 1 Fibre Channel Arbitrated Loop
- 3 PCI 132MB/s data transfers, 32-bit, 33MHz
- 4 Internal and external 68-pin SCSI connectors
- 5 Includes high-speed RAID data path engine, hardware XOR and ECC processor
- 6 Support for up to 64MB of hardware cache

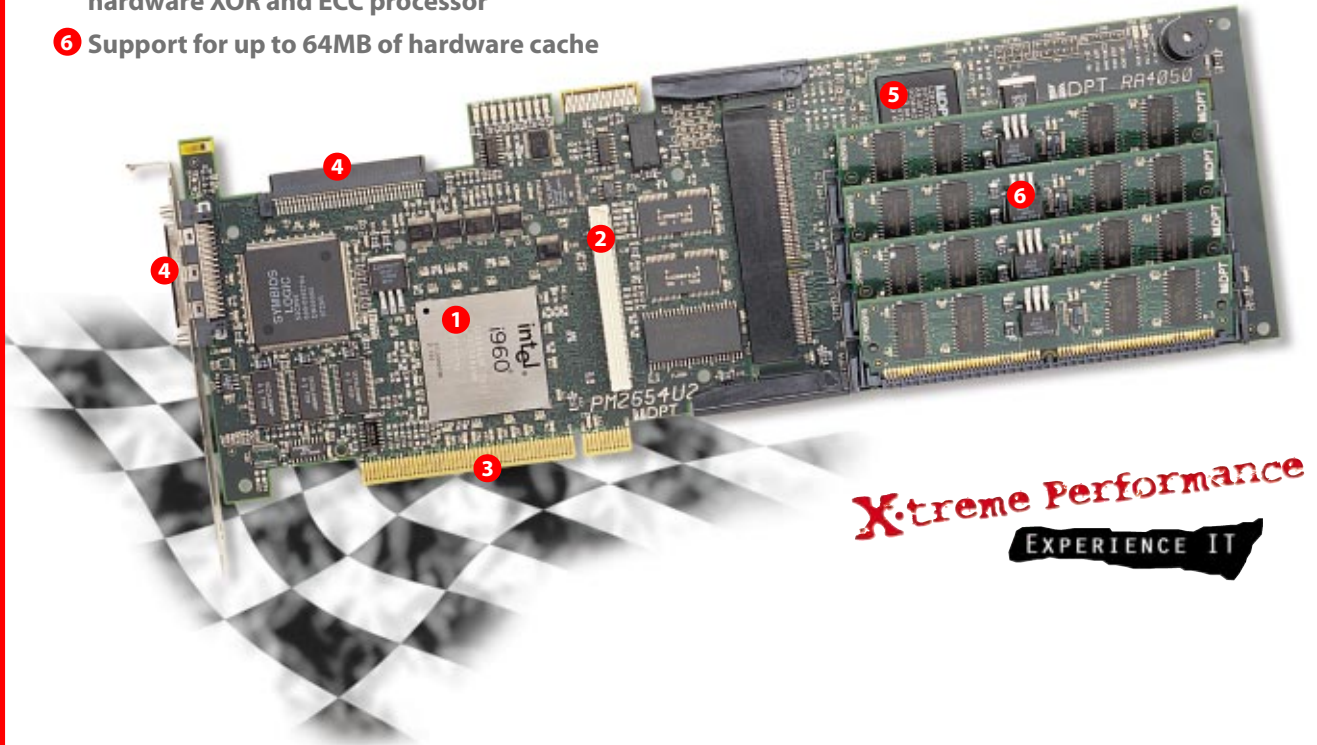

X-treme Performance
EXPERIENCE IT

Features:

- Fully I₂O® compliant
- Controls SCSI-1, SCSI-2 or SCSI-3 devices
- Controls Wide or Narrow Ultra2, Ultra or Fast SCSI devices with up to 80MB/s transfer rate
- Controls up to 15 SCSI devices per channel
- Up to 12 meter SCSI cable length
- Integrated hardware RAID 0, 1, 5, 0+1 and 0+5
- 4 SIMM sockets support up to 64MB of hardware cache (DPT ECC EDO or industry standard EDO SIMMs)
- Expansion Modules add 1 or 2 additional Ultra2 SCSI channels or 1 Fibre Channel Arbitrated Loop
- PCI 2.1 compliant with 132MB/s bus mastering
- Intel i960 RD processor for ultra-low host CPU utilization
- SCSI SCRIPTS® processor for maximum SCSI performance
- Very high-density SCSI connector allows 3 external SCSI channels from one slot
- Flash-upgradable firmware and BIOS
- Supports SAF-TE, SES and DEC Fault Bus for intelligent storage cabinets
- Dynamic Array Expansion permits drives to be added on-the-fly to existing arrays
- Easy-to-use GUI Storage Management Software
- BIOS-based SCSI and RAID configuration utility

PM2654U2-R Technical Specifications

Expansion Modules

SX4054U2 SCSI Expansion Modules

add one (SX4054U2-1) or two (SX4054U2-2) additional Ultra2 SCSI channels to any SmartRAID V SCSI controller, supporting up to 45 SCSI devices from a single PCI slot. Supports Fast and Ultra SCSI devices as well.



SX4055F Fibre Expansion Module

adds one Fibre Channel Arbitrated Loop port to any SmartRAID V SCSI or Fibre Channel controller, controlling up to 126 Fibre Channel devices.



SM4050 ECC EDO SIMMs provides 16MB (SM4050-16) or 64MB (SM4050-64) of high-speed disk cache for SmartRAID V controllers, plus DPT's exclusive SmartCorrect™ ECC technology which detects and corrects up to 32-bit data errors. (SmartRAID V controllers also accept industry standard EDO 4MB, 16MB or 64MB SIMMs.)



Management Utilities

Storage Manager™ is a window into your storage system. This user-friendly, self-installing, GUI-based utility provides:

- Easy, point-and-click creation, deletion and maintenance of disk arrays
- Array diagnostics
- Event logging and notification
- I/O load monitoring
- Device identification, status, and inventory
- Supports Windows® 95/98, NT®, NetWare®, SCO® Unix®, UnixWare® and others
- Remote management of NT, NetWare, SCO Unix, UnixWare and other servers via TCP/IP or modem connection
- Online help

SMOR (Storage Manager On ROM) is a BIOS-based set-up utility that allows you to quickly configure SmartRAID controllers and attached devices without having to boot an operating system. Features include:

- Device identification, status, and inventory
- Configure controller hardware options
- Low-level formatting hard drives
- Create and delete disk arrays
- View and modify RAID configurations

● SCSI Features

SCSI Interface	Ultra2 SCSI-3
Maximum SCSI Transfer Rate	80MB/s
SCSI Bus	16-bit with multi-mode SE/LVD termination
Number of SCSI Busses	1 (upgradable to 3)
Maximum Number SCSI Devices	15 (upgradable to 45)
External SCSI Connector	68-pin Very High Density Cable Interconnect (VHDCI)
Internal SCSI Connector	68-pin High Density

● PCI Features

Host Interface	32-bit PCI 2.1
Maximum PCI Transfer Rate	132MB/s

● Operating Environments

- Microsoft® Windows® NT® 4.0, SCO® 3.2.4.2, SCO OpenServer 5, NetWare® 4.11, UnixWare® 2.1.4.2, SCO UnixWare 7, OS/2®, Win 95/98
- I₂O compliant
- Compatible with I₂O block storage or SCSI OSMs provided with Windows NT, SCO, NetWare

● Power Requirements

Voltage	5V +/- 5%
Ripple and Noise	50mV peak-to-peak max
Current	2.0A typical

● Reliability

MTBF	> 400,000 Hours
-------------	-----------------

● Environmental Specifications (operating)

Ambient Temperature	0° to 50° C
Relative Humidity	10% to 90% non-condensing
Altitude	3,000 meters (10,000 feet)

● Agency Certifications

FCC, CE, UL, CSA, AUSTEL, SMA

● Complete Kit Contents

- PM2654U2-R Ultra2 SCSI RAID Controller
- Ultra2 Wide internal SCSI cable with multi-mode terminator, supports 4 SCSI devices
- Storage Management software
- I₂O device drivers
- User's Manual and Quick Install Guide



DPT Corporate Headquarters

140 Candace Drive, Maitland, FL 32751 USA
Tel 407/830-5522 FAX 407/260-5366
Sales FAX 407/260-6690 BBS 407/831-6432
Internet: www.dpt.com

Northern Europe

Milton Keynes, United Kingdom
Tel 44(0)1908-233951
FAX 44(0)1908-230837

Southern Europe

Munich, Germany
Tel 49 (0) 89 92 404 160
FAX 49 (0) 89 92 404 200

DPT Japan (JTI)

Tokyo, Japan
Tel (81) 3-5951-4302
FAX (81) 3-5951-4304

Poland

Poznan-Koziegłowy
Tel 48 (0) 602-258303
FAX 48 (0) 61-8520702

DPT Australia

Watson (Canberra)
Tel (011) 61-412-004830
FAX (011) 61-624-89732

© 1998 Distributed Processing Technology Corporation. All rights reserved. Distributed Processing Technology, the DPT logo and SmartRAID are registered trademarks of Distributed Processing Technology Corporation. Storage Manager and SmartCorrect are trademarks of Distributed Processing Technology Corporation. All other trademarks are property of their respective owners.